


## OVERLOAD

โอเวอร์โหลด

MODEL	L	W	H	D	RATED HEATING CURRENT ITH (A)	PRICE
TH-N12	45	55	76.5	M3.5	1.0-1.6A, 1.4-2.0A, 1.7-2.5A, 2.0-3.0A, 2.8-4.4A, 4.0-6.0A, 5.2-8.0A, 7.0-11.0A, 9.0-13.0A	350.-
TH-N20	63	51	79	M4.5	4.0-6.0A, 5.2-8.0A, 7.0-11.0A, 9.0-13.0A, 12.0-18.0A, 16.0-22.0A, 18.0-26.0A, 24.0A-34.0A, 30.0-40.0A	390.-
TH-N60	89	57	83.5	M4.5	18.0-26.0A, 24.0A-34.0A, 30.0-40.0A, 34.0-50.0A, 43.0-65.0A, 54.0-80.0A 65.0-93.0A, 85.0-105.0A	720.-




TH-N12



TH-N20



TH-N60



## ENCLOSED MOTOR STARTER



แมกเนติกพร้อมกล่อง



MS-N10, N11




MS-N20, N21

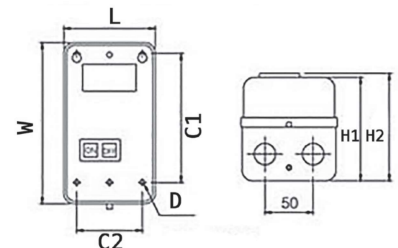

MODEL	RATED HEATING CURRENT ITH (A)	L	W	H1	H2	C1	C2	D	PRICE
MS-N10	2.8-4.4A 220V, 2.8-4.4A 380V, 4.0-6.0A 220V, 4.0-6.0A 380V, 5.2-8.0A 220V, 5.2-8.0A 380V, 7.0-11.0A 220V, 7.0-11.0 380V	80	159	97.5	105	120	45	M4	1,220.-
MS-N11	9.0-13.0A 220V, 9.0-13.0A 380V	80	159	97.5	105	120	45	M4	1,300.-
MS-N20	12.0-18.0A 220V, 12.0-18.0A 380V, 16.0-22.0A 220V, 16.0-22.0A 380V	104	170	110	116	140	176	M5	1,950.-
MS-N21	12.0-18.0A 220V, 12.0-18.0A 380V, 16.0-22.0A 220V, 16.0-22.0A 380V	104	170	110	116	140	176	M5	2,000.-

## COIL

คอยล์



S-N50, 65



S-N10-12



S-N20-21



S-N25, 35

MS-N10PM	VOLTAGE	PRICE
COIL for S-N10, S-N11, S-N12	110V 220V 380V	140.-
COIL for S-N20, S-N21		160.-
COIL for S-N25, S-N35		200.-
COIL for S-N50, S-N65		730.-