


KD CONNECTORS [MIL-DTL-5015]

▶ Alternate Insert Positions / 절연체 회전위치

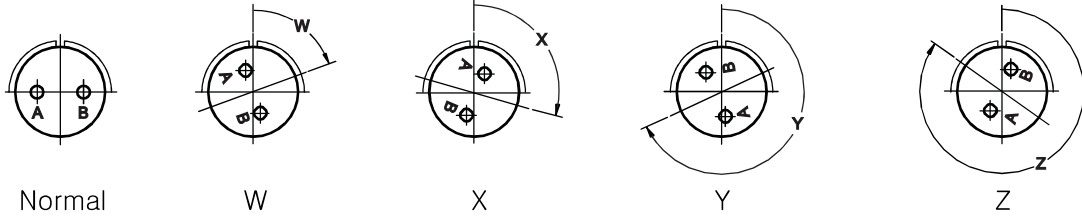


Shell size	INSERT Number	Contacts						Alternate Pos.			
		Tot	0	4	8	12	16	W	X	Y	Z
10SL	10SL-3	3					3				
	10SL-4	2					2				
12S	12S-3	2					2	70	145	215	290
	12S-4	1					1				
12	12-5	1				1					
14S	14S-1	3					3				
	14S-2	4					4	120	240		
	14S-4	1					1				
	14S-5	5					5	110			
	14S-6	6					6				
	14S-7	3					3	90	180	270	
	14S-9	2					2	70	145	215	290
14	14-3	1			1						
16S	16S-1	7					7	80			280
	16S-5	3					3	70	145	215	290
	16S-8	5					5	170	265		
16	16-9	4				2	2	35	110	250	325
	16-10	3				3		90	180	270	
	16-11	2				2		35	110	250	325
	16-12	1		1							
18	18-1	10					10	70	145	215	290
	18-3	2				2		35	110	250	325
	18-4	4					4	35	110	250	325
	18-5	3				2	1	80	110	250	280
	18-6	1		1							
	18-7	1			1						
	18-8	8				1	7	70			290
	18-9	7				2	5	80	110	250	280
	18-10	4						120	240		
	18-11	5						170	265		
	18-12	6					6	80			280
	18-13	4			1	3		80	110	250	280
	18-19	10							120	240	
	18-20	5					5	90	180	270	
18-21	3					3					

Shell size	INSERT Number	Contacts						Alternate Pos.			
		Tot	0	4	8	12	16	W	X	Y	Z
18	18-22	3					3	70	145	215	290
20	20-2	1	1								
	20-3	3				3		70	145	215	290
	20-4	4				4		45	110	250	
	20-6	3					3	70	145	215	290
	20-7	8					8	80	110	250	280
	20-8	6			2		4	80	110	250	280
	20-9	8				1	7	80	110	250	280
	20-11	13					13				
	20-15	7				7		80			280
	20-16	9				2	7	80	110	250	280
	20-17	6				5	1	90	180	270	
	20-18	9				3	6	35	110	250	325
	20-19	3			3			90	180	270	
	20-21	9				1	8	35	110	250	325
	20-22	6			3		3	80	110	250	280
	20-23	2			2			35	110	250	325
	20-24	4			2		2	35	110	250	325
20-25	13					13					
20-27	14					14		35	110	250	
20-29	17					17		80		280	
20-33	11					11					
22	22-1	2			2			35	110	250	325
	22-2	3			3			70	145	215	290
	22-4	4			2	2		35	110	250	325
	22-5	6				2	4	35	110	250	325
	22-7	1	1								
	22-8	2			2			35	110	250	325
	22-9	3				3		70	145	215	290
	22-10	4					4	35	110	250	325
	22-12	5			2		3	80	110	250	280
	22-14	19					19	80	110	250	280
	22-15	6				5	1	80	110	250	280
	22-16	9				3	6	80	110	250	280
	22-17	9				1	8	80	110	250	280

KD CONNECTORS [MIL-DTL-5015]

▶ Alternate Insert Positions / 절연체 회전위치

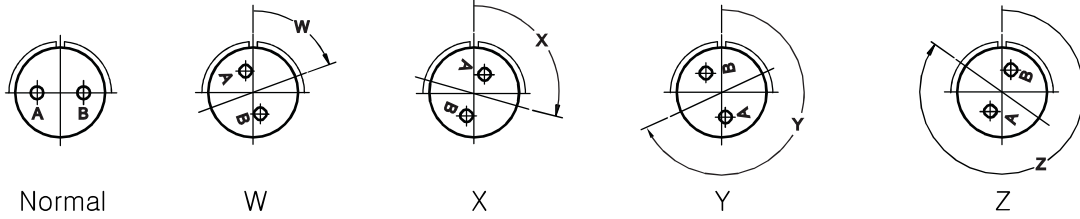

Shell size	INSERT Number	Contacts						Alternate Pos.			
		Tot	0	4	8	12	16	W	X	Y	Z
22	22-18	8					8	80	110	250	280
	22-19	14					14	80	110	250	280
	22-20	9					9	35	110	250	325
	22-22	4			4				110	250	
	22-23	8				8		35		250	
	22-27	9			1		8	80		250	280
	22-28	7				7		80			280
24	24-2	7				7		80			280
	24-3	7				2	5	80	110	250	280
	24-5	16					16	80	110	250	280
	24-6	8				8		80	110	250	280
	24-7	16				2	14	80	110	250	280
	24-9	2		2				35	110	250	325
	24-10	7			7			80			280
	24-11	9			3	6		35	110	250	325
	24-12	5		2		3		80	110	250	280
	24-17	5				2	3	80	110	250	280
	24-20	11				2	9	80	110	250	280
	24-22	4			4			45	110	250	
	24-23	5			3		2	80	110	250	280
	24-27	7					7	80			280
	24-28	24					24	80	110	250	280
28	28-1	9			3	6		80	110	250	280
	28-2	14				2	12	35	110	250	325
	28-3	3			3			70	145	215	290
	28-4	9				2	7	80	110	250	280
	28-5	5		2		1	2	35	110	250	325
	28-6	3		3				70	145	215	290
	28-7	2		2				35	110	250	325
	28-8	12				2	10	80	110	250	280
	28-9	12				6	6	80	110	250	280
	28-10	7		2	2	3		80	110	250	280
	28-11	22				4	18	80	110	250	280
	28-12	26					26	90	180	270	
	28-15	35					35	80	110	250	280

Shell size	INSERT Number	Contacts						Alternate Pos.			
		Tot	0	4	8	12	16	W	X	Y	Z
28	28-16	20					20	80	110	250	280
	28-17	15					15	80	110	250	280
	28-18	12					12				
	28-19	10				4	6	80	110	250	280
	28-20	14				10	4	80	110	250	280
	28-21	37					37	80	110	250	280
	28-22	6		3			3	70	145	215	290
	28-51	12				12		80	135	195	
32	32-1	5	2			3		80	110	250	280
	32-2	5		3			2	70	145	215	280
	32-4	14				2	12	80	110	250	280
	32-5	2	2					80	110	250	325
	32-6	23		2	3	2	16	80	110	250	280
	32-7	35				7	28	80	125	235	280
	32-8	30				6	24	80	125	235	280
	32-9	14		2			12	80	110	250	280
	32-10	7		2	2		3	80	110	250	280
	32-13	23				5	18	80	110	250	280
	32-15	8	2			6		35	110	250	280
	32-17	4		4				45	110	250	
	32-22	54					54	80	110	250	280
36	36-1	22				4	18	80	110	250	280
	36-3	6	3			3		70	145	215	290
	36-4	3	3					70	145	215	290
	36-5	4	4					120	240		
	36-6	6	2	4				35	110	250	325
	36-7	47				7	40	80	110	250	280
	36-8	47				1	46	80	110	250	280
	36-9	31		1	2	14	14	80	125	235	280
	36-10	48					48	80	125	235	280
	36-14	16			5	5	6	90	180	270	
	36-15	35					35	60	125	245	305
36-20	34			2	2	30					
36-52	52					52	72	144	216	288	
40	40-56	85					85	72	144	216	288